
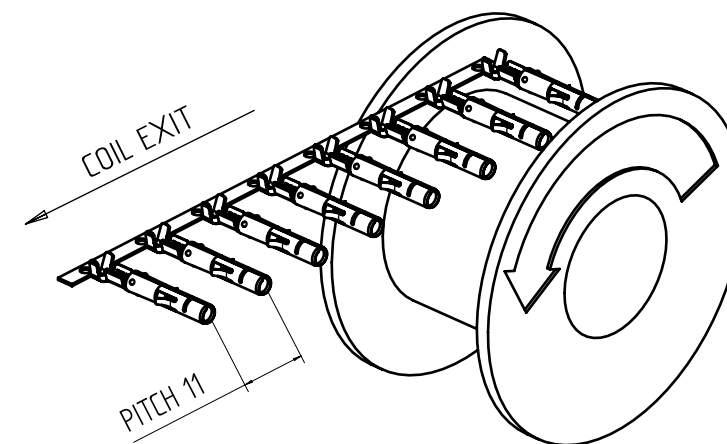
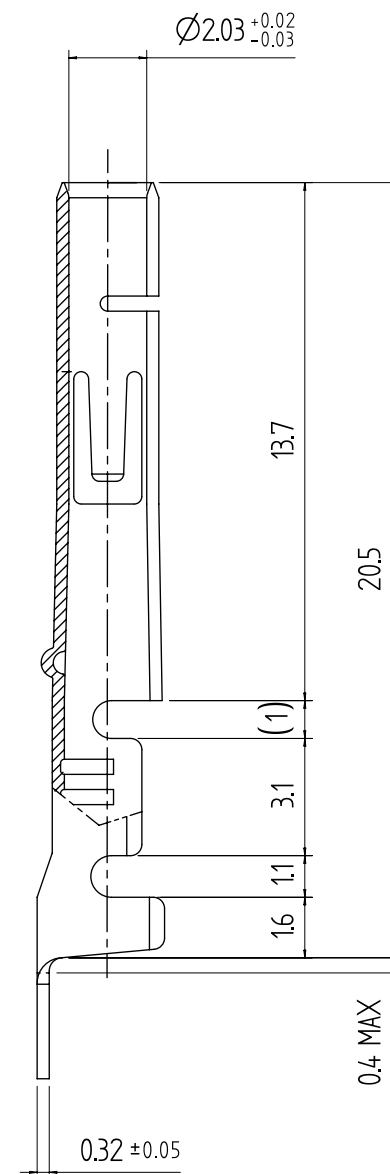
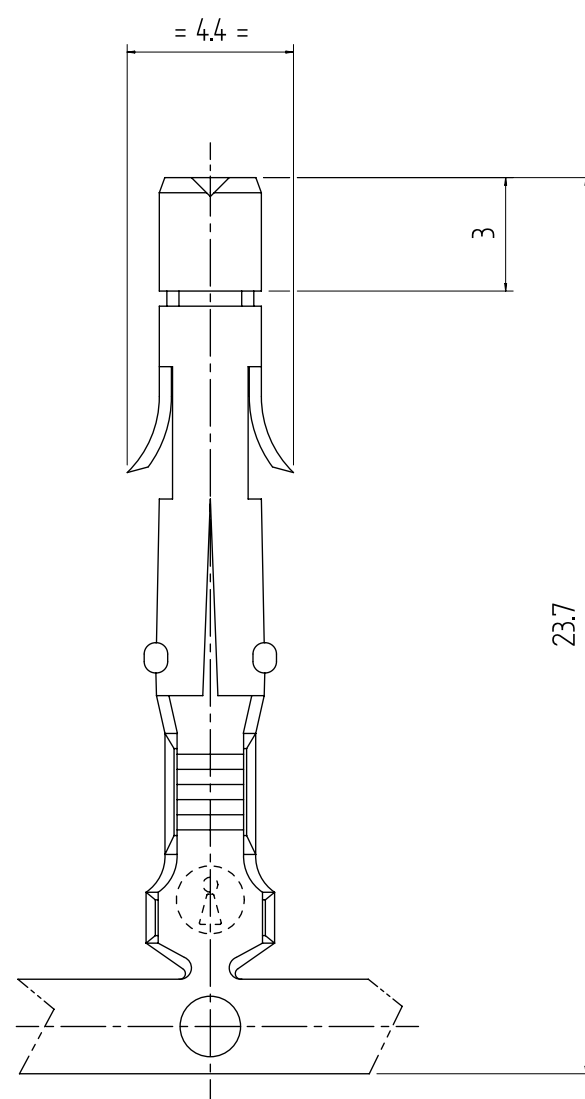




- 01 Matchable with pin terminal INAR-LOCK UNIVERSAL series
- 02 Wire range: 0.25 - 0.75 mm²
Insulation range: Ø1.5 - 2.2 mm
Crimping with mini-applicator AT750311060

0011060101	CuZn	Pre-Tinned	cURus
CODE	MATERIAL	SURFACE FINISH	VALIDATION

CUSTOMER DRAWING									
UNLESS OTHERWISE SPECIFIED		DRAWING N° PL11060	NAME INAR-LOCK UNIVERSAL SOCKET OPEN D=2.1 (0.25-0.75)				 inarca		
ALL DIMENSIONS IN MM									
GENERAL TOLERANCES									
LINEAR	±0.2mm	VERSION 8	MATERIAL SEE TABLE				DRF. BOISCHIO	DT. 1989-09-26 00:00:00	
ANGULAR	±1°	PROJECT	FINISH SEE TABLE				APP. P.TONIOLO	DT. 29/08/2023	
NON DIMENSIONED EDGES	0.2X45°	PRODUCT SPECIFICATION 101102105700	SIZE A3		SCALE 5:1	SHEET 1 OF 1		PRD. P.TONIOLO	DT. 29/08/2023
SURFACE ROUGHNESS								FRZ.	DT.
INARCA S.P.A. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN									