

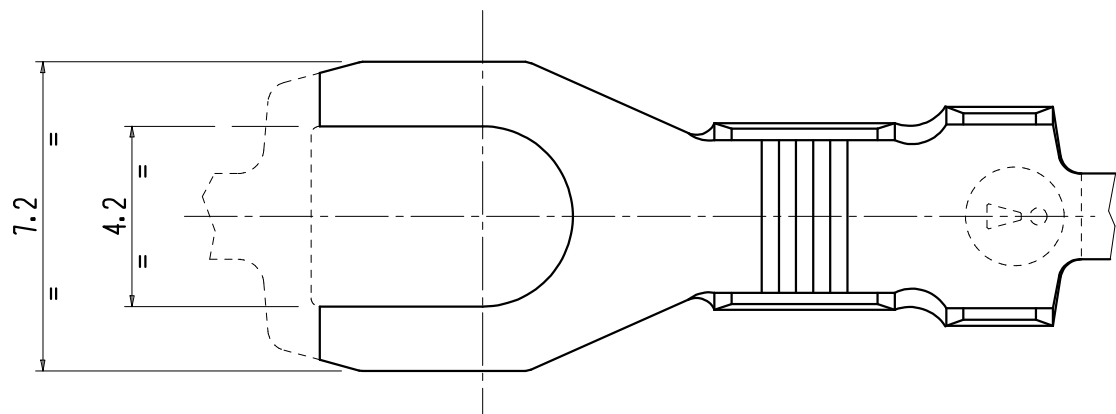


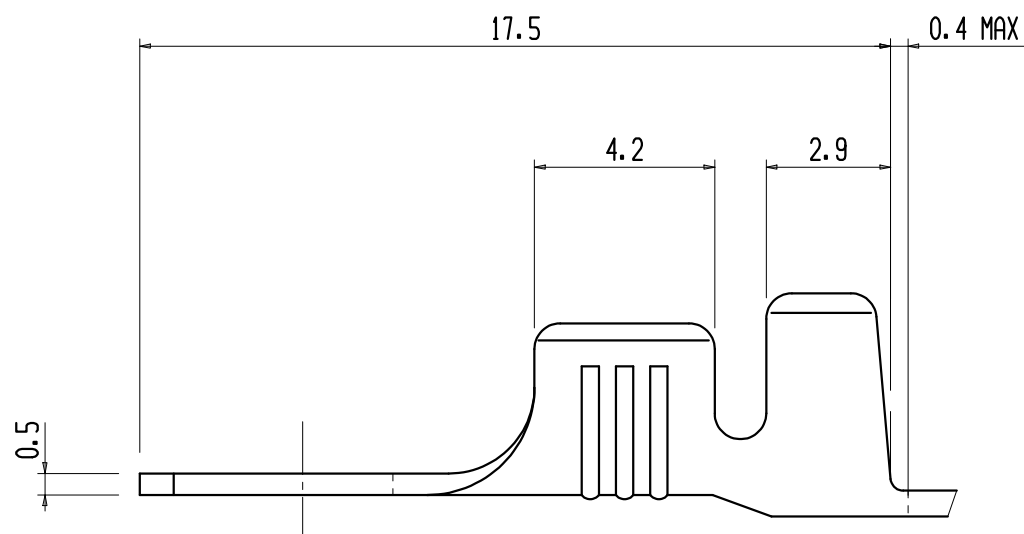

- 01 Suitable with connecting pin $\varnothing$ 4 mm
- 02 Wire range: 1-2.5 mmq
Sheat range: 2.5-4 mm
Crimped with linear miniapplicator code AT750210252A

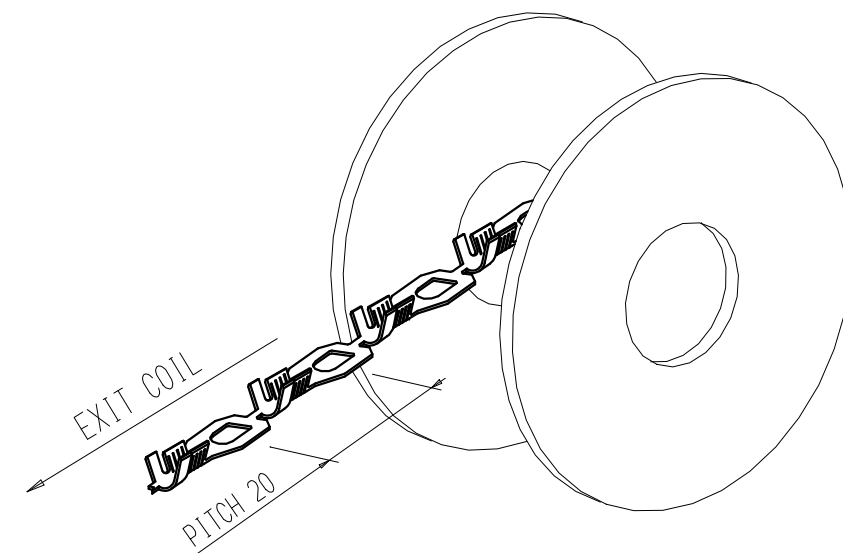

DISEGNO PER CLIENTE
SOLO PER RIFERIMENTO

CUSTOMER DRAWING
FOR REFERENCE ONLY

ORDER N.	GENERAL TOLLERANCE	Angularity	Non Dimensioned Edges	Surface Roughness														
DRAWING N. PL10622	MATERIAL																	
VERSION 3 MOD. INDEX 4	HEAT TREATMENT																	
PROJECT	FINISHING																	
	LINEAR TOLLERANCE	Size	fino a 3	> 3 a 6	> 6 a 10	> 10 a 18	> 18 a 30	> 30 a 50	> 50 a 80	> 80 a 120	> 120 a 180	> 180 a 250	> 250 a 315	> 315 a 400	> 400 a 500	RED. COPPO	DT. 03/04/1978	
	ISO J13		±	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11	0.13	0.15	0.16	0.18	0.2	APP. TONIOLO	DT. 12/10/2018
			±	0.07	0.09	0.11	0.14	0.17	0.2	0.23	0.27	0.32	0.36	0.4	0.45	0.5	RIL. TONIOLO	DT. 12/10/2018
			±	-	-	0.75	0.9	1.05	1.25	1.5	1.75	2	2.3	2.6	2.85	3.15	PUB.	DT.
NAME FORK TERMINAL D=4.2 X 7.2 X 17.5 1-2.5 (AWG 17-13)																		
INARCA S.p.a. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.																		

0210622401	Fe	NichelPlated	
0010622201	CuZn	TinPlated	
0010622001	CuZn		
CODE	MATERIAL	SURFACE FINISH	VALIDATION