

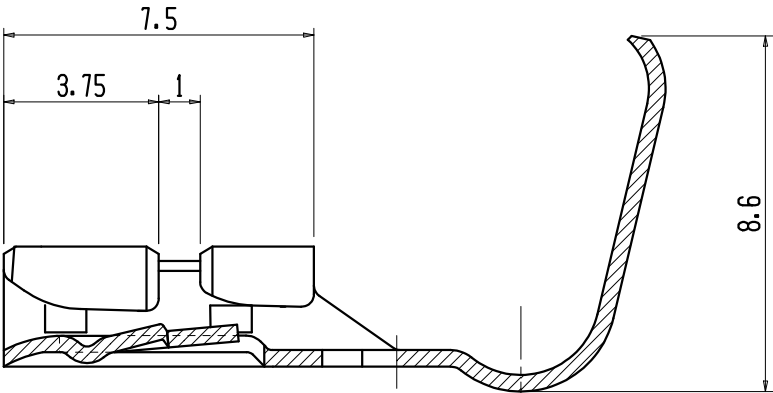
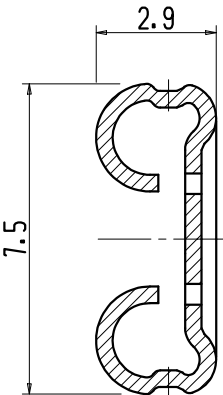


- 01
- Female side suitable for TAB 6.3x0.8 DIN 46244
Inserted into connector code PP50282
and code PP52020


- 02
- Stranded wire section: 1 - 2,5 mmq
Sheath diameter: 2.3 - 4 mm
Crimped with frontal mini-applicator:
AT750211352B - AT750211352W1

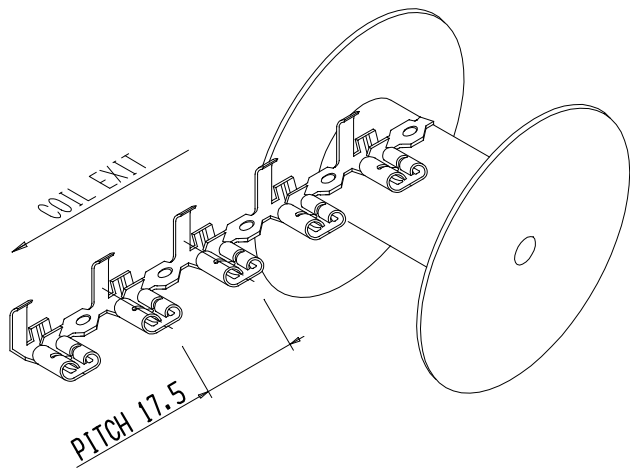

SEC. B-B

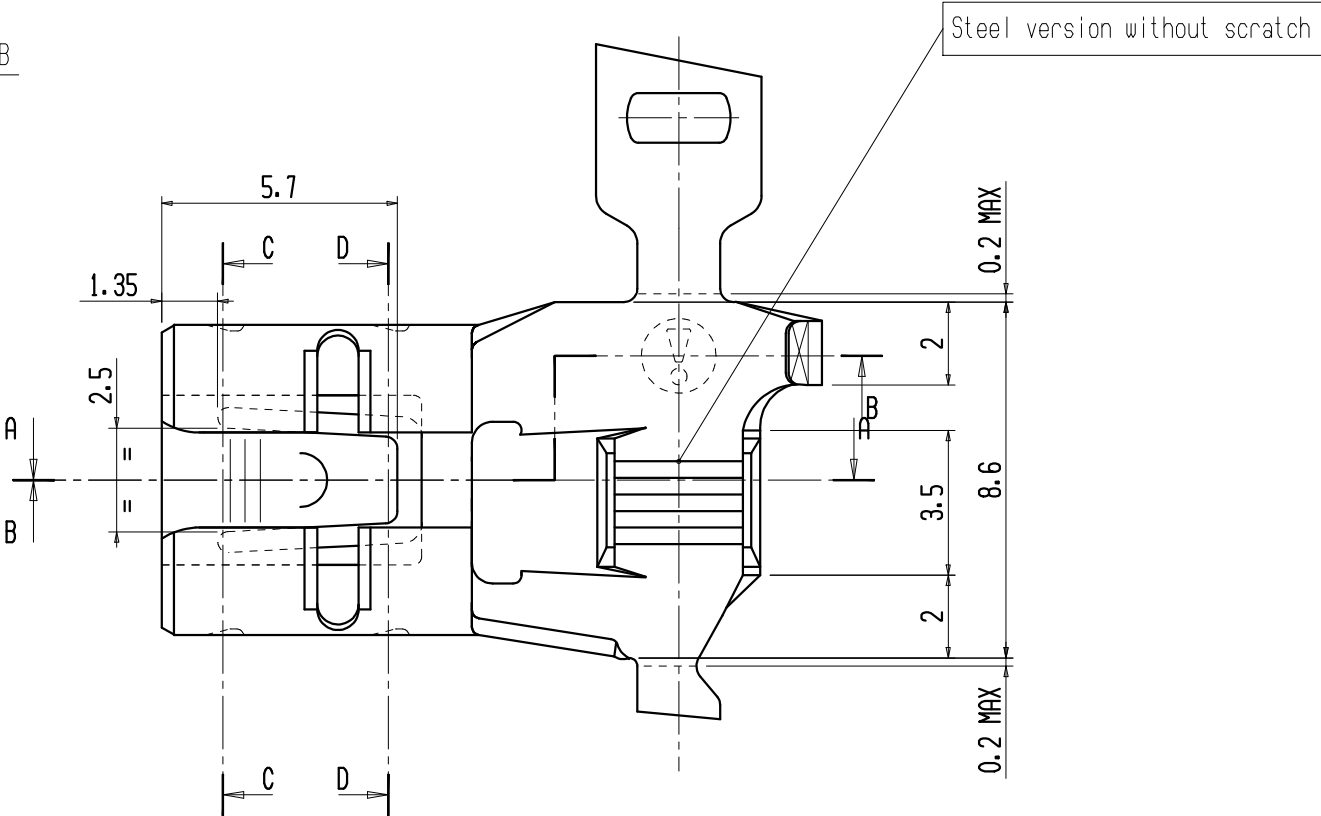

SEC. C-C

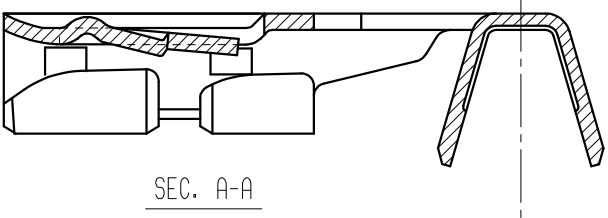

SEC. A-A

0211352121	Fe	Ni	
0911352001	CuNiZn	-	
0211352127	Fe	Ni	
0011352301	CuZn	SilverPlated	
0011352201	CuZn	TinPlated	cURus-VDE
0011352001	CuZn	-	cURus-VDE
CODE	MATERIAL	SURFACE FINISH	VALIDATION

DISEGNO PER CLIENTE
SOLO PER RIFERIMENTO

CUSTOMER DRAWING
FOR REFERENCE ONLY

ORDER N.	GENERAL TOLLERANCE	Angularity	Non Dimensioned Edges	Surface Roughness	
DRAWING N. PL11352	MATERIAL				
VERSION 17 MOD. INDEX	HEAT TREATMENT				
PROJECT	FINISHING				
	LINEAR TOLLERANCE ISO J13	TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.2 mm			RED. COPPO DT. 24/05/1999
NAME INAR-LIF FLAG TYPE RECEPTACLE 6.3X0.8 1-2,5					
INARCA S.p.a. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.					

APP. TONIOLO DT. 29/06/2021	DT. 29/06/2021
RIL. TONIOLO	PUB. DT.